

blueTank PUR 15/25

Tank units for the gentle melting
of reactive adhesives

The units of the blueTank PUR series have been specifically designed for the processing of reactive thermoplastics and optimised product quality.

The integrated inert gas system prevents premature ageing of the adhesive and guarantees consistent application quality and process safety.

The modular unit is designed for easy servicing and user-friendly control and handling.


Equipped with 1 or 2 pumps.
Tank with VX anti-stick coating.
User-friendly system control with touch screen panel.

Compact unit designed for long service life. Low-maintenance design.



fig. blueTank PUR 15



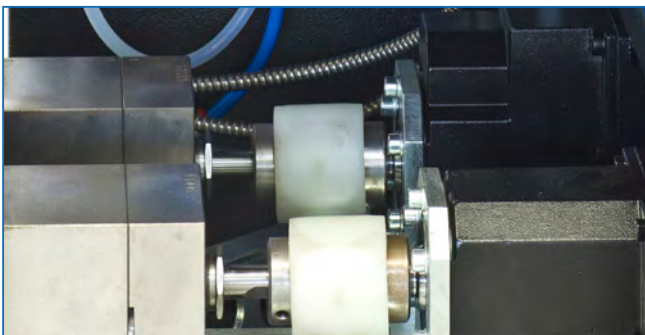

Technical data	blueTank PUR 15	blueTank PUR 25
Heating capacity	from 6kW	from 8kW
Melting capacity	max 15kg/h	max 25kg/h
Quantity pumps	1 or 2	1 or 2
quantity output ports	1- 4	1- 4
Temperature range	50-220°C	50-220°C